



Access Online



Article DOI:

10.5281/zenodo.21412877

IMPROVEMENT IN PERFORMANCE PARAMETERS OF A MICROSTRIP ANTENNA

Santosh Yadav¹, Kishan Singh²

ABSTRACT

Effect of a change in Patch geometry on the performance of a microstrip antenna is presented. The change in patch geometry is affected by inserting a V-slot and vertical identical slots on the patch. With a V-slot, the antenna resonates with four bands having bandwidths of 1.3% at 4GHz, 6% at 7GHz, 3.1% at 10GHz and 1.07% at 13GHz. Also the return losses are -10.6117dB, -15.26dB and -16.05dB. With five identical vertical slots, the antenna resonates with four bands in which two are negligible and remaining are resonating much beyond the design frequency of 4GHz

KEYWORDS: Bandwidth, Gain, Ground Plane, Multiple Bands, Return Loss, Proximity, Aperture

I. INTRODUCTION

The architecture and development of microwave antennas seems to be the most critical task for achieving optimum radiation characteristics of microwave communication devices. Mainly due to their extensive applications in microwave communication, the microstrip antennas (MSAs) have recently become one of the most significant classes among the different types of microwave antennas. They can be easily integrated with microwave integrated circuits (MICs) and show the unique characteristics of linear as well as circular polarization. They come in various shapes like rectangular, square, circular, triangular, elliptical and can be housed easily on moving vehicles. But these antennas have some drawbacks like narrow bandwidth, low efficiency, low gain, extraneous radiation from feeds and junctions. To overcome these drawbacks researchers have worked by using parasitic elements [2], thicker substrate [3], proximity coupling [4], aperture coupling [5] etc. In this work the effect of a change in the patch geometry is explored. The change in geometry is affected by cutting a V-slot and five identical vertical slots on

the patch. A 36% reduction in resonant frequency and a 60% reduction in the overall size of the antenna is reported in the literature. First a conventional antenna without slots and 0.16cm is designed and simulated. It is observed that the antenna with only one band at around 4.125 GHz and a bandwidth of 1.56%. The return loss is observed to be -23.019 dB. With a V-slot and five identical vertical slots the antenna resonates with four bands showing a considerable improvement over the conventional antenna.

II. ANTENNA CONFIGURATION

Using the equations available in the literature [6-7], the microstrip patch, the microstrip line feed and the quarter wave transformer are designed. The artwork is sketched using the computer programme Auto-cad 2006 to achieve better accuracy. The antennas are fabricated using photolithography process on low-cost substrate material of glass epoxy with thickness of $h=3.2\text{mm}$ and the dielectric constant $\text{low-cost}=4.2$.

Fig.1(a) shows the top view of the conventional microstrip antenna. Fig.1.

¹ Associate Professor,
Department of EEE,
GNDEC, Bidar

² Associate Professor
Nanak Dev
Engineering College,
Bidar, India

How to Cite:

Santosh Yadav &
Kishan Singh (2026),
Improvement
in Performance
Parameters of A
Microstrip Antenna,
International
Educational Journal of
Science & Engineering
(IEJSE), Vol: 9, Special
Issue, May 2026
300-303

(b). shows antenna with a vertical slot on the surface of the patch. The slot dimensions, length and width are taken in terms of λ_0 , the free space wavelength of the antenna. The free space wavelength λ_0 is given by c/f_r where f_r is resonant frequency of the antenna which is also the design frequency. In the current work the antenna is designed for a frequency of 4.2GHz. Fig.1(c) the antenna with five vertical slots etched on the patch.

Fig. 1(a): Conventional Microstrip Antenna

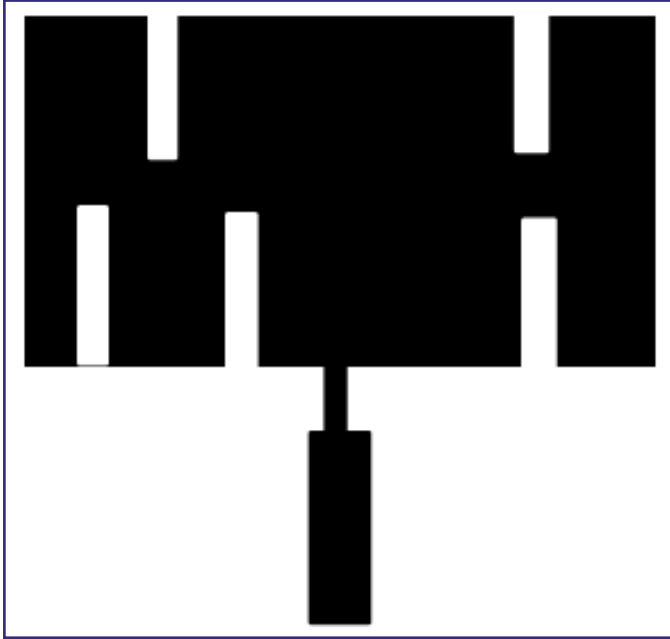


Fig.1(b) V-slot Microstrip Antenna


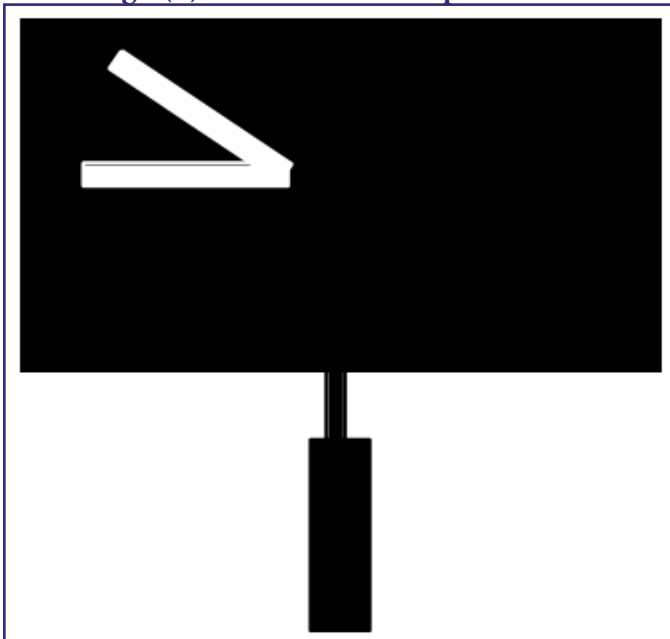


Fig.1(c): Five vertical slot Microstrip Antenna

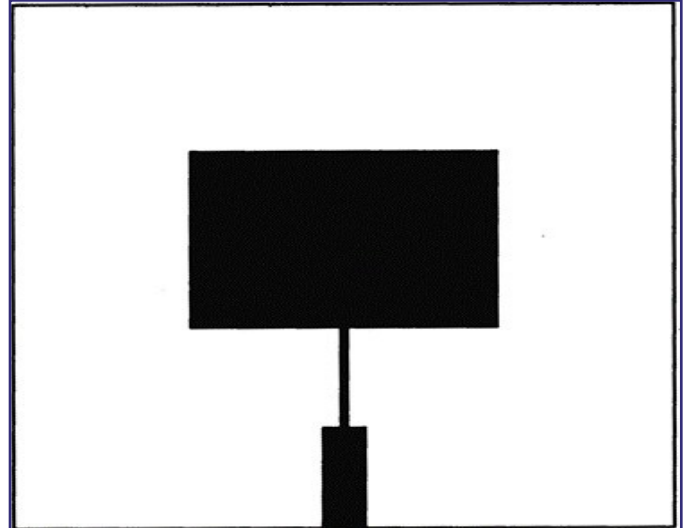

3. EXPERIMENTAL RESULTS

The antennas are simulated using Ansoft HFSS13 and studied for parameters like return loss and radiation pattern. Figure.3. shows the simulated model of proximity feed MSA and Fig.4. show the variation of its return loss as a function of frequency. The bandwidth is determined by using the following equation:

$$\text{Bandwidth} = \left[\frac{(f_2 - f_1)}{f_c} \right] \times 100\%$$

Where f_2 and f_1 are the lower and upper cut-off frequencies of the band respectively when the return loss goes less below -10dB and f_c is the centre frequency between f_1 and f_2 .

The antenna with a V-slot resonates with four frequency bands. The bandwidth of the 1.3% at 4 GHz, 6% at 7 GHz, 3.1% at 10 GHz and 1.07% at 13 GHz. Also, the return losses are -10.6117 dB, -15.26 dB and -16.05 dB respectively. Fig.2. shows the simulated model of the antenna with a V-Slot and Fig.3. shows its return loss at different frequencies.

Fig.2. V slot MSA geometry

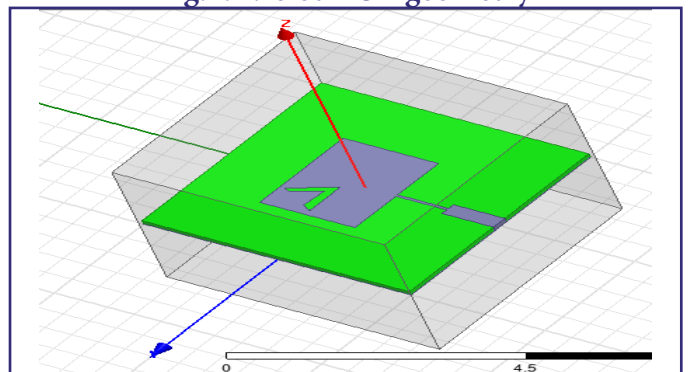


Fig. 3: Return loss vs. frequency of V slot MSA

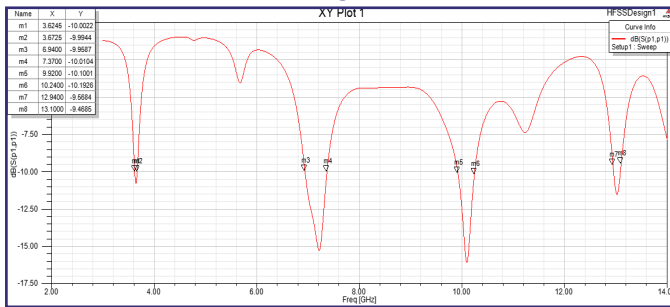


Fig. 4: V-slot MSA radiation pattern

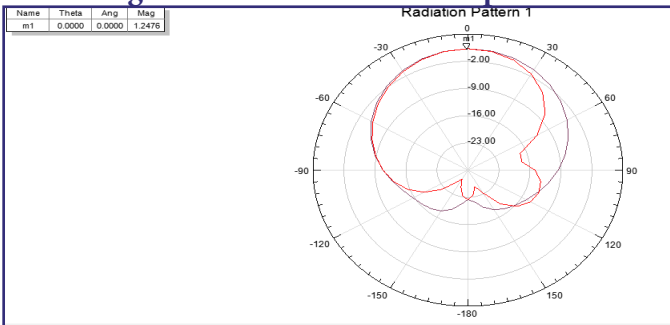


Fig.4 shows the radiation pattern of the antenna.

Fig.5. shows the simulated model of the antenna with five slots on the patch.

Fig. 5: Geometry view of 5SMSA

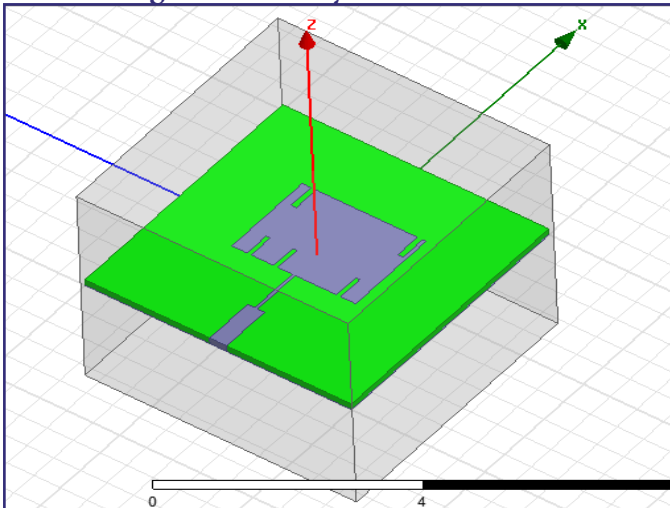


Fig.6. and Fig.7. show the return loss and radiation pattern of the antenna respectively. There are two slots at the top corner, two slots at the left bottom and one slot in the bottom right corner of the patch. The substrate is clearly designed in accordance with the requirements. The feeds and the patch are then mounted on the substrate and then the slots are cut

out of the patch.

Fig. 6: Return loss against frequency of 5SMSA


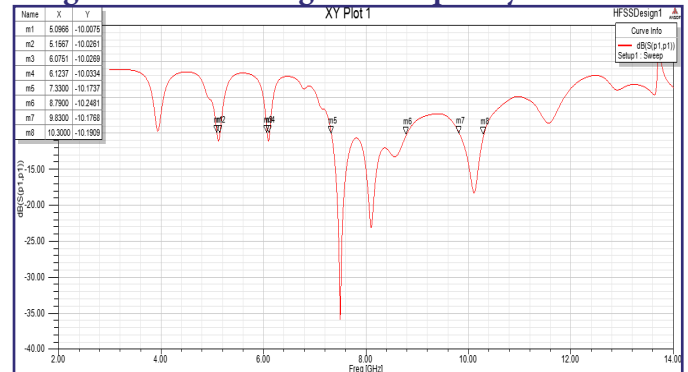


Fig. 7: Radiation Pattern of 5SMSA

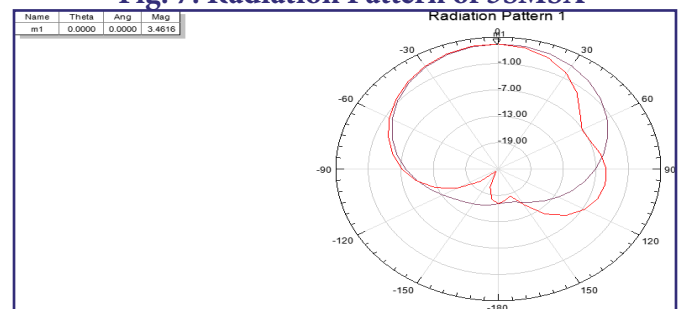

4. CONCLUSIONS

As is observed in the return loss, a modification in the patch geometry results in the improvement in number of bands, return loss and the radiation pattern. The antenna without slots resonates with only one band. With a V-slot four frequency bands are obtained. The bandwidth of the 1.3% at 4 GHz, 6% at 7 GHz, 3.1% at 10 GHz and 1.07% at 13 GHz. Also the return losses are -10.6117 dB, -15.26 dB and -16.05 dB respectively. For the antenna with five vertical slots, there are four bands in which two have considerable bandwidth and other two have negligible. This concludes that a change in the patch geometry results in a change in the performance of the antenna. With a suitable predetermined change the variables of interest like return loss, radiation pattern, number of bands and bandwidth can be improved.

REFERENCES

1. John. D.Kraus "Antennas for all applications", McGraw Hill, New Delhi, 2006.
2. I. J Bahl & p. Bhartia "Microstrip Antennas", Dedham MA: Artech House, 1981.
3. N.M. Sameena, Kishan Singh, R.B. Konda & S.N.

- Mulgi, "Design and Development of aperture coupled microstrip antennas for intensified bandwidth, adequate gain and low cross-polarization ", Microwave and optical technol. Letts, (2010), Vol.52, No. 2, pp.403-406.
4. Zarren Aijaz & S.C. Srivastava "An introduction to aperture coupled microstrip slot ", International Journal of Engineering, Science and Technology (2010), Vol.2, No.9, pp. 36-39.
 5. Shyh-Yeong Ke "Broadband Proximity-coupled Microstrip Antennas with a H-shaped slot in the ground plane", IEEE Trans Antennas & Propag. Proc.(2002) pp.530-533.
 6. Constantine A. Balanis, Antenna Theory-Analysis and Design, John Wiley and Sons. Inc ., New York, 1982.
 7. Tsien Ming Au and Kwai Man Luk, "Effect of parasitic element on the characteristics of microstrip antenna", IEEE Trans. Antennas propagation, vol.39, no.8, pp.1247-1251, Aug. 1991.
 8. I.J. Bahl and P. Bharti "Microstrip antennas", Artech House, New Delhi, 1980.